

TECHNICAL SPECIFICATIONS - WAAREE PV MODULES

Electrical Characteristics *	WS-120/WU-120	WS-125/WU-125	WS-130/WU-130	WS-140/WU-140	WS-150	WS-160
Power (Pm) in Watts (nominal)	120	125	130	140	150	160
Open Circuit Voltage (Voc) in Volts	21	21	21	21	43	43
Short Circuit Current (Isc) in Amps	7.62	7.94	8.25	8.89	4.65	4.96
Voltage at Maximum Power (Vmp) in Volts	17	17	17	17	35	35
Current at Maximum Power (Imp) in Amps	7.06	7.35	7.65	8.24	4.29	4.57
Maximum System Voltage	1000V/600V	1000V/600V	1000V/600V	1000V/600V	1000V	1000V
Physical Parameters (Refer drawing below)						
Solar Cells per Module (Units)	36	36	36	36	72	72
Length x Width x Thickness (L x W x T)	mm(Inches) 1490 x 675 x 35 (58.7 x 26.6 x 1.4)				1175 x 990 x 35(46.3 x 39.0 x 1.4)	
Weight - Kg	11.75	11.75	11.75	11.75	14.45	14.45
Mounting Holes Pitch (Y)	mm(Inches) 915(36.0)				595(23.4)	
Mounting Holes Pitch (X)	mm(Inches) 627(24.7)				945(37.2)	
Area - Sq. M / Area - Sq. ft.	1.009(10.86)				1.163(12.52)	
Junction Box	IP 65 with Diodes	IP 65 with Diodes	IP 65 with Diodes	IP 65 with Diodes	IP 65 with Diodes	IP 65 with Diodes

*Measurement Tolerance on Power +/- 5%. All electrical parameters specified at STC : 25°C cell temperature; 100mW/cm² irradiance; AM 1.5


Other Characteristics

Type of Cell : Mono / Multi Crystalline Silicon
 Front Face : Tempered Glass (Low Iron)
 Encapsulate : Ethylene Vinyl Acetate
 Frame : Anodized Aluminium
 Junction Box : Weather Proof Nylon 6
 Temp. Coefficients : Voltage -0.123 V / °K
 Current +4.4 mA / °K
 Power -0.47% / °K
 NOCT : 47+/-2 °C

- Certifications: IEC 61215 / IEC 61730 -1 / IEC 61730 - 2 / TUV Safety Class II & ETL Mark for UL 1703 approval (USA & CANADA); CEC listed
- The Standard range of modules is supplied without diodes. However, diodes can be provided on specific customer request at extra cost.
- All modules are supplied with screwless Hollow section frames.
- Warranty : Up to 25 Years Limited Extended Warranty
- Due to constant product modifications, WAAREE reserves the right to amend the above specifications without prior notice.

Mounting Details

All dimensions in mm and tolerances ±2mm

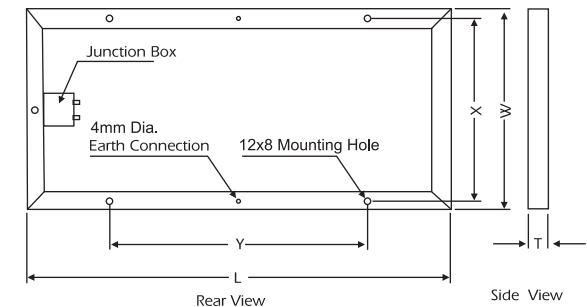

WEPL/WS-160/Rev-4/Feb.10

WAAREE Energies Pvt. Ltd.

H.O. : Mumbai, India Factory : Surat, India
 Tel.: +91-22-66963030 Fax : +91-22-26873613 Email : infosolar@waaree.com

